



10	9	8	7	6	5	4	3	2	1
PART NUMBER	PART STATUS	PACKAGING							
87607-1011	TOOLED	TRAY							

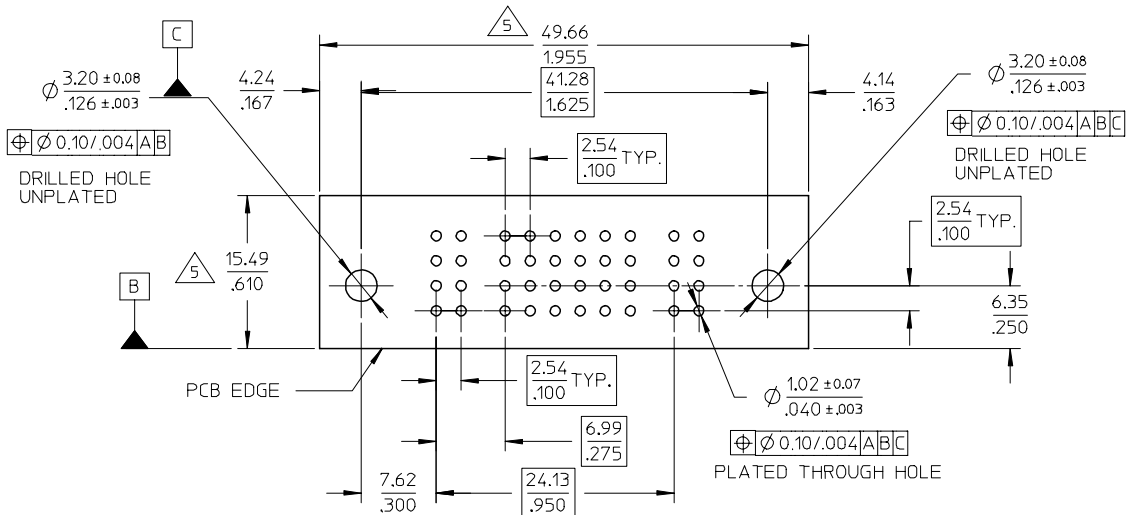

NOTES:

- MATERIALS : HOUSING - LCP, GLASS FILLED, UL94V-0, COLOR: BLACK
POWER PINS - COPPER ALLOY
SIGNAL PINS - COPPER ALLOY
- FINISHES: POWER AD SIGNAL PINS
SELECTIVE GOLD IN THE CONTACT AREA
THICKNESS = 0.76 MICROMETER / 30 MICROINCH MINIMUM
SELECTIVE TIN ALLOY IN THE PC TAIL AREA
THICKNESS = 2.54 MICROMETER / 100 MICROINCH MINIMUM
1.27um MINIMUM NICKEL OVERALL UNDERPLATE.
- PRODUCT SPECIFICATIONS : PS-87606-002
- SEE SHEET 2 FOR RECOMMENDED PCB LAYOUT AND THICKNESS
- COMPONENT STAY AWAY ZONE FROM CONNECTOR

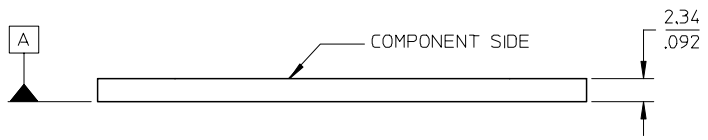

REVISED EC NO: S2007-0873 DRWNS:KANG 2007/04/11 CHKD:GEMARLY 2007/04/11 APPR:MLONG 2007/04/12	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
	▽=0 ∇=0	mm	INCH	MM/IN		NTS	METRIC			
		4 PLACES ± ---	± ---	DRAWN BY		DATE	TITLE			
		3 PLACES ± ---	± .005	KMG0H		2003/12/04	DPS,PWR CONNECTOR RECPT. P-S-P CONFIGURATION R/A, T/H, SCREW MOUNT			
	2 PLACES ± 0.13	± .010	PTL IM		2004/03/09	MOLEX INCORPORATED				
	1 PLACE ± 0.25	± ---	ANGULAR ± 3 °		SKT0H	2004/03/17	MATERIAL NO. DOCUMENT NO. SHEET NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-87607-017		2 OF 2	
C1	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								