


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	101 Ω	210 Ω	362 Ω
Minimum	- Ω	168 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

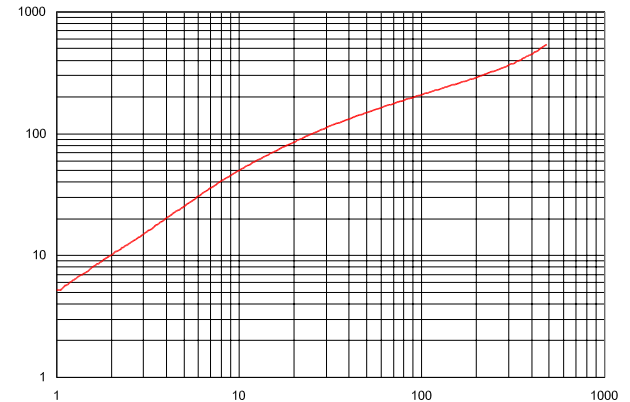


FREQUENCY (MHz)

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	15.01 [.591]	+ 0.38 [.015]
B	10.00 [.394]	+ 0.25 [.010]
C	23.00[.906]	+ 0.50 [.020]
D	7.49 [.295]	+ 0.25 [.010]
E	1.80 [.071]	+ 0.25 [.010]

WEIGHT/1000 10.41 kgs 22.95 Lbs]

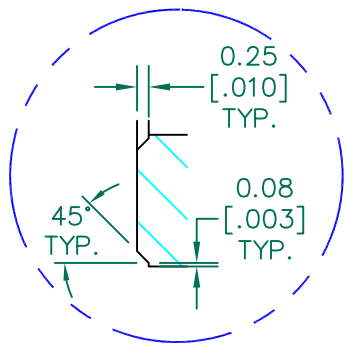


DETAIL "A"
CHAMFER
SCALE=6:1

UNCONTROLLED DOCUMENT

(5)

SCALE DRAWING 1:1



28R0593-000

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird TECHNOLOGIES®	
PROJECT/PART NUMBER:				REV	PART TYPE:	DRAWN BY:	
28R0593-000				A	FERRITE RIBBON CORE	JUN	
DATE: 04/19/10				SCALE: 3 : 1		MATERIAL:	
A ORIGINAL DRAFT 04/19/10 JUN				CAD # 28R0593-000-A		Ferrite	
REV	DESCRIPTION	DATE	INT				