
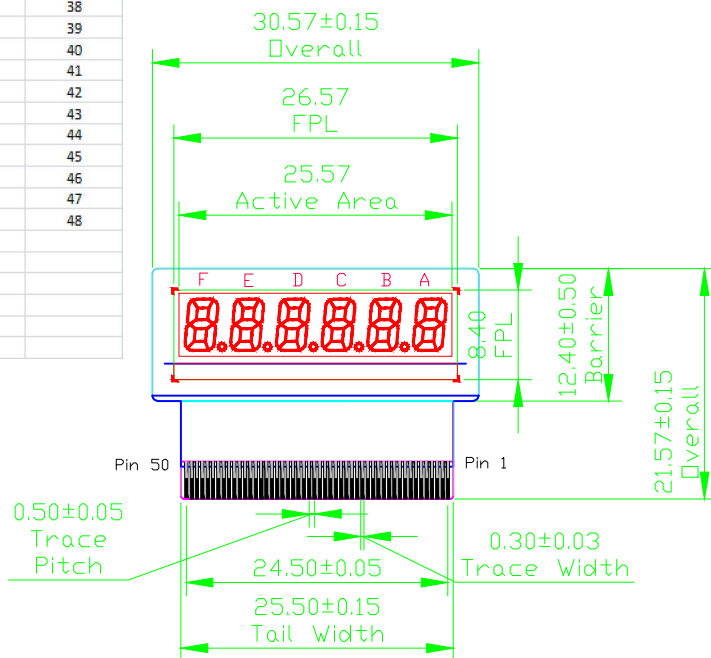


Pin	Description	Segment	Pin	Description	Segment
1	Top electrode		27	DA	26
2	Field	1	28	DB	27
3	AA	2	29	DC	28
4	AB	3	30	DD	29
5	AC	4	31	DE	30
6	AD	5	32	DF	31
7	AE	6	33	DG	32
8	AF	7	34	DH	33
9	AG	8	35	EA	34
10	AH	9	36	EB	35
11	BA	10	37	EC	36
12	BB	11	38	ED	37
13	BC	12	39	EE	38
14	BD	13	40	EF	39
15	BE	14	41	EG	40
16	BF	15	42	EH	41
17	BG	16	43	FA	42
18	BH	17	44	FB	43
19	CA	18	45	FC	44
20	CB	19	46	FD	45
21	CC	20	47	FE	46
22	CD	21	48	FF	47
23	CE	22	49	FG	48
24	CF	23			
25	CG	24			
26	CH	25			



50 blank


Connector-  
Tyco  
5-1734592-0

REV.	DESCRIPTION	DESIGN	DATE
	INITIAL RELEASE		

SDC 2 (100UM THICK PTF BACKPLANE) MATERIALS LIST				
ITEM	LAYER COLOR	DESCRIPTION	MATERIAL	THICKNESS (µm)
1		BACKPLANE	MYLAR PET	100
2		ELECTRODE-FRONT	CARBON	12.50
3		ELECTRODE-FRONT 1	SILVER	12.50
4		ELECTRODE-REAR 2	CARBON	12.50
5		DIELECTRIC	DIELECTRIC	35
6		FRONT BARRIER	EINK 110-1031	175
7		REAR BARRIER	EINK 110-1032	100
8		FPL	340-1934 (220S)	175
9		STIFFENER	MYLAR PET	180
10		STIFFENER ADHESIVE	PSA	50

Note:  
1. SDC should be built in accordance with the MFG Spec.  
2. Critical Dimensions Should Be Denoted with Min-Max Tolerances.

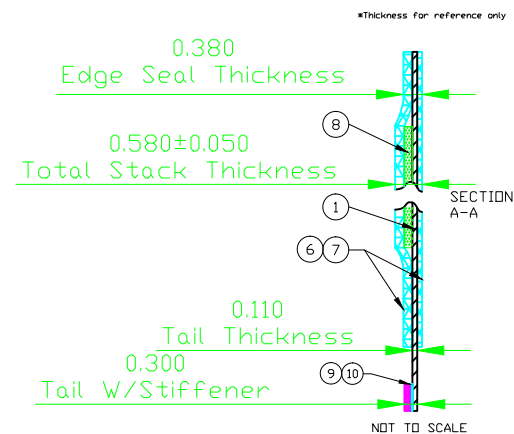

MATERIAL	HEAT & SURFACE TREATMENT	E Ink Holdings Inc.		
APPROVE	S ONell	SCALE	UNIT	PROJECTION METHOD
CHECK	S ONell	1/1	mm	DWG NAME
DESIGN	S ONell	ORIGINAL NAME		49 seg
				DWG. NO. SC005221
				REV. SHEET 04 1/1